

Basic Function/Copy Function

Item	ApeosPort-III 7000	ApeosPort-III 6000	ApeosPort-III 5000	
Type	Console Type			
Memory Capacity <sup>*1</sup>	768MB (Max.1GB)			
Hard Disk Capacity <sup>*2</sup>	60GB (available capacity: 40GB)			
Scanning Resolution	600x600dpi			
Printing Resolution	2,400dpi equivalentx600dpi			
Half-tone	256 levels			
Warm-up Time	30 seconds or less (at room temperature of 20°C)			
Original Paper Size	Maximum for sheet and book: 297x432 mm (A3, 11x17")			
Output Paper Size	Max.	A3, 11x17" [For By-pass Tray: 12x18" (304.8x457.2mm)]		
	Min.	A5 [For By-pass Tray: Postcards (made by Japan Post Service Co., Ltd.)]		
Output Paper Weight <sup>*3</sup>	Image Loss	Lead edge 4mm or less, Trail edge 4mm or less, Right & Left Edges 4mm or less		
	Trays	52-200g/m <sup>2</sup>		
First Copy Output Time	By-pass Tray	52-250g/m <sup>2</sup> <sup>*4</sup>		
		3.0 seconds (A4LEF)	3.1 seconds (A4LEF)	
Magnification	100%	1:1±0.7%		
	Preset	1:0.500, 1.0, 707, 1.0, 816, 1.0, 866, 1:1.154, 1:1.225, 1:1.414		
Continuous Copy Speed <sup>*4</sup>	Variable	1:0.25-1:4.00 (by 1% increments)		
	B5LEF	79cpm	68cpm	58cpm
	A4LEF	75cpm	65cpm	55cpm
	A4/B5	55cpm	47cpm	40cpm
	B4	44cpm	39cpm	33cpm
	A3	37cpm	33cpm	28cpm
Feed Tray/Capacity <sup>*5</sup>	Standard	560 sheets x 2 trays + 1,710 sheets + 2,140 sheets + 100 sheets (By-pass Tray) = 5,070 sheets		
	Optional	High-capacity feed tray (one tray): 2,300 sheets, high-capacity feed tray (two trays): 2,300 sheets x 2 trays		
Continuous Copy <sup>*6</sup>	Maximum Paper Capacity	9,820 sheets (standard - high-capacity feed tray (two trays))		
	Output Tray Capacity <sup>*5</sup>	9,999 sheets		
Power Supply	Power Consumption	1.5kW or less		
	Dimensions	Sleep Mode: 1.8W, Standby Mode <sup>*7</sup> : 162W		
Weight <sup>*8</sup>	Weight	(W)620x(D)815x(H)1,154mm		
	Space Requirement	195kg		
		(W)1,491x(D)815mm (with By-pass Tray extended)		

\*1: Extension memory may be required depending on the functions used. Removing 256 MB of memory and purchasing 512 GB of memory is necessary to reach 1.024 MB. \*2: Not all of the indicated hard disk capacity may be available. \*3: Use of Fuji Xerox brand paper is recommended. Document may not be printed correctly depending on usage conditions. \*4: The speed may be lower due to image quality adjustment. \*5: Fuji Xerox "P" paper. \*6: In order to stabilize the image quality, machine may stop its operation temporarily. \*7: Low Power mode is not set at shipment (time for recovering from Low Power mode is about 10 seconds). \*8: Except for toner.

Fax Function

Item	Description	
Sent Document Size	Max.: A3, 11x17", Long size document (Max. 600mm)	
Recording Paper Size	Max.: A3, 11x17", Min.: A5	
Transmission Time	Less than 3 seconds <sup>*1</sup>	
Transmission Mode	G3	
Transmission Resolution	Standard	8x3.85 lines/mm, 200x100dpi (7.9x3.9 dots/mm)
	Fine	8x7.7 lines/mm, 200x200dpi (7.9x7.9 dots/mm)
	Super Fine (400dpi)	16x15.4 lines/mm, 400x400dpi (15.7x15.7 dots/mm)
Super Fine (600dpi)	600x600dpi (23.6x23.6 dots/mm)	
Coding Method	MH, MR, MMR, JBIG	
Transmission Speed	G3: 33.6/31.2/28.8/26.4/24.0/21.6/19.2/16.8/14.4/12.0/9.6/7.2/4.8/2.4kpbs	
Applicable Lines	Telephone subscriber line, PBX, facsimile communication network (PSTN), Max. 3 ports <sup>*2</sup>	

\*1: When A4 size document with approximately 700 characters is transmitted in standard image-quality (8x3.85 lines/mm) and in high speed mode (28.8kpbs or faster, BIG). Only indicates the time for transmitting the image information and does not include the communication control time. The total communication time will vary depending on the contents of the document, the type of machine receiving the fax, and line condition. \*2: Up to three lines can be connected. Number of ports is that of the channels that can be used for communication.

Internet Fax Function

Item	Description
Sent Document Size	A3, B4, A4
Transmission Resolution	Same as those in Fax Function
Output Format	Format: TIFF-FX, Compression method: MH, MMR, JBIG
Profile	TIFF-S, TIFF-F, TIFF-J
Protocol	To send: SMTP, To receive: SMTP, POP3

High-capacity Duplex Automatic Document Feeder

Item	ApeosPort-III 7000	ApeosPort-III 6000	ApeosPort-III 5000
Type	Duplex Automatic Document Feeder		
Original Paper Size/Paper Weight	Max.: A3, 11x17", Min.: A5, 38-200g/m <sup>2</sup> (Monochrome duplex: 50-200g/m <sup>2</sup> , Color duplex: 50-128g/m <sup>2</sup> )		
Feeding Capacity <sup>*1</sup>	250 sheets		
Feeding Speed <sup>*2</sup>	75cpm	65cpm	55cpm

\*1: Fuji Xerox "P" paper. \*2: A4LEF/Simplex

Print Function

Item	Description	
Type	Built-in Type	
Continuous Print Speed <sup>*1</sup>	Same as those shown in Basic Function/Copy Function	
Resolution	Output	1,200x1,200dpi
	Data Processing	Standard: 600x600dpi, High resolution: 1,200x1,200dpi
PDL	Standard	ART EX
	Optional	Adobe® PostScript® 3 <sup>TM</sup>
Protocol	Ethernet (Standard)	TCP/IP (Ipd, IPP, Port9100, SMB, WSD, Novell® NetWare®, BMLinks®), Novell® NetWare® (IPX/SPX), NetBEUI (SMB), EtherTalk <sup>*2</sup>
	Standard	Windows® 2000 Japanese/English, Windows® XP Japanese/English, Windows Server® 2003 Japanese/English, Windows Vista® Japanese/English, Windows Server® 2008 (x86) Japanese/English, Windows® XP Professional x64 Edition Japanese/English, Windows Server® 2003 x64 Editions Japanese/English, Windows Vista® 64-bit Japanese/English, Windows Server® 2008 (x64) Japanese/English
OS <sup>*3</sup>	Optional	[Adobe® PostScript® 3 <sup>TM</sup> Kit] Windows® 2000 Japanese/English, Windows® XP Japanese/English, Windows Server® 2003 Japanese/English, Windows Vista® Japanese/English, Windows Server® 2008 (x86) Japanese/English, Windows® XP Professional x64 Edition Japanese/English, Windows Server® 2003 x64 Editions Japanese/English, Windows Vista® 64-bit Japanese/English, Mac OS X 10.3.9-10.4.11, 10.5 (except for 10.4.7) Japanese
	Standard	Outline (Heisei-Minchou <sup>TM</sup> W3, Heisei-Kaku-Gothic <sup>TM</sup> WS, European 17 Fonts), Stroke (Japanese Fonts, European Fonts: for HP-GL), [Adobe® PostScript® 3 <sup>TM</sup> Kit] Heisei 3 Fonts: Japanese 3 Fonts (Heisei-Minchou <sup>TM</sup> W3, Heisei-Kaku-Gothic <sup>TM</sup> WS Heisei-Maru-Gothic <sup>TM</sup> W4), European 136 Fonts Morisawa 2 Fonts: Japanese 2 Fonts (Ryumin L-KL <sup>TM</sup> , Middle Gothic BBB <sup>TM</sup> ), European 136 Fonts [Emulation Kit] European 82 Fonts, Symbol 37 Sets
Fonts	Optional	ART IV, ESC/P (VP-1000), BMLinks®, PDF, XPS, Docuworks, TIFF, JPEG
	Standard	[Emulation Kit] PC-PR201H, HP-GL (HP7586B), HP-GL2/RTL (HP Design Jet750C Plus), PCL5/PCL6
Emulation	Optional	Ethernet 100BASE-TX/10BASE-T, USB2.0 <sup>*4</sup>
	Standard	Ethernet 1000BASE-T <sup>*6</sup>
Interface	Optional	Ethernet 1000BASE-T <sup>*6</sup>

\*1: Printing speed may be lower depending on documents when printed in high resolution. \*2: The optional Adobe® PostScript® 3<sup>TM</sup> kit is required. Supports Mac OS 8.6/9.2.2 Japanese, Mac OS X 10.3.9/10.4.10 Japanese. \*3: Please refer to the Fuji Xerox web site about the latest compliant OS information. \*4: Supports Windows® 2000, Windows® XP, Windows Server® 2003, Windows Vista®, Windows Server® 2008 (x86), Windows® XP Professional x64 Edition, Windows Server® 2003 x64 Editions, Windows Vista® 64-bit, Windows Server® 2008 (x64), Mac OS 8.6/9.2.2 Japanese, Mac OS X 10.3.9/10.4.10/10.5 Japanese. \*5: To print in a Linux® OS environment, please use the Japanese Linux® printer driver which can be downloaded from the Fuji Xerox web site as non-guaranteed software.

Scan Function

Item	Description	
Type	Color Scanner	
Original Paper Size	Same as those shown in Basic Function/Copy Function	
Scanning Resolution	600x600dpi, 400x400dpi, 300x300dpi, 200x200dpi	
Scanning Half-tone	10-bit input and 8-bit output for each RGB	
Scanning Speed <sup>*1</sup>	Monochrome: 80ipm, Color: 50ipm (in monochrome 1-pass duplex scan, 160 impressions/m <sup>2</sup> ) [Fuji Xerox standard document (A4LEF), 200dpi, Stored to mailbox]	
Interface	Standard	Ethernet 100BASE-TX/10BASE-T
	Optional	Ethernet 1000BASE-T
Protocol	Standard	TCP/IP (WebDAV, HTTP)
	Optional	Monochrome Binary/Grayscale: TIFF, DocuWorks <sup>®2</sup> , PDF <sup>®2</sup> , XPS <sup>®2</sup> Full Color: TIFF, JPEG, DocuWorks <sup>®2</sup> , PDF <sup>®2</sup> , XPS <sup>®2</sup> High-compression DocuWorks <sup>®3</sup> , High-compression PDF <sup>®3</sup> , High-compression XPS <sup>®3</sup>
Scan to Mailbox	Driver	TWAIN
	OS <sup>*4</sup>	Windows® 2000 Japanese/English, Windows® XP Japanese/English, Windows Server® 2003 Japanese/English, Windows Vista® Japanese/English, Windows Server® 2008 (x86) Japanese/English, Windows® XP Professional x64 Edition Japanese/English, Windows Server® 2003 x64 Editions Japanese/English, Windows Vista® 64-bit Japanese/English, Windows Server® 2008 (x64) Japanese/English
Save to PC	Protocol	TCP/IP (SMB, FTP)
	OS <sup>*4</sup>	Windows® 2000 Japanese/English, Windows® XP Japanese/English, Windows Server® 2003 Japanese/English, Windows Vista® Japanese/English, Windows Server® 2008 (x86) Japanese/English, Windows® XP Professional x64 Edition Japanese, Windows Server® 2003 x64 Editions Japanese, Windows Vista® 64-bit Japanese, Mac OS X 10.2.x/10.3.8/10.3.9/10.4.2/10.4.4/10.4.8/10.4.9/10.4.10/10.5.0/10.5.1/10.5.2/10.5.3/10.5.4 Japanese/English, NetWare 5.11/J.5.121 Japanese <sup>*5</sup>
e-Mail	Output Format	Monochrome Binary: TIFF (Compression method: MH, MMR), DocuWorks, PDF, XPS Grayscale/Full Color: TIFF (Compression method: JPEG), JPEG, DocuWorks, PDF, XPS, High-compression DocuWorks <sup>®3</sup> , High-compression PDF <sup>®3</sup> , High-compression XPS <sup>®3</sup>

\*1: Scanning speed varies according to the document type. \*2: When scanned image is retrieved using CentreWare Internet Services. \*3: When the optional Image Compression Kit and Extension Power Supply Kit are installed. \*4: Please refer to the Fuji Xerox web site about the latest compliant OS information. \*5: Supports only FTP.

Direct Fax Function

Item	Description	
Sent Document Size	A3, B4, A4	
Transmission Speed	Same as those in Fax Function	
Transmission Resolution	Standard	200x100dpi (7.9x3.9dots/mm)
	Fine	200x200dpi (7.9x7.9dots/mm)
	Super Fine	400x400dpi (15.7x15.7dots/mm), 600x600dpi (23.6x23.6dots/mm)
Applicable Lines	Same as those in Fax Function	
OS <sup>*</sup>	Windows® 2000 Japanese/English, Windows® XP Japanese/English, Windows Server® 2003 Japanese/English, Windows Vista® Japanese/English, Windows Server® 2008 (x86) Japanese/English, Windows® XP Professional x64 Edition Japanese/English, Windows Server® 2003 x64 Editions Japanese/English, Windows Vista® 64-bit Japanese/English, Windows Server® 2008 (x64) Japanese/English	

\*Please refer to the Fuji Xerox web site about the latest compliant OS information.

<Reproduction Prohibitions> Please note that reproduction of the following is prohibited by law:

●Domestic and overseas bank notes and coins, government-issued securities, national bonds and local bond certificates. ●Unused postage stamps and post cards. ●Certificate stamps stipulated by law. ●The reproduction of copyrighted works (literary works, musical works, paintings, engravings, maps, cinematographic works, photographic works, etc.) is prohibited except when they are reproduced personally, at home or within limited range. ●This product has an anti-counterfeit feature. This feature does not assure complete prevention of illegal reproduction. Please be careful about the management of equipment used.

<For Your Safe Use>

⚠ Before using the product, read the Instruction Manual carefully for proper use. ●Use the product with an appropriate and adequate power source and voltage displayed. ●Be sure to ground the machine. In the case of a failure or short circuit, an electric shock may result.



For comments about Fuji Xerox and consultation, contact the **Customer Information Center.**

**0120-27-4100**

Toll-free call service time: 9:00 to 12:00 and 13:00 to 17:00 excluding Saturdays, Sundays and national holidays (at Headquarters in Tokyo). However, you cannot use this service with an extension telephone with call area restrictions. Please use a nation-wide call available telephone.

The telephone call might be recorded to correctly understand your inquiry or to later check how the receiver provided support.



# ApeosPort Value (Added Value of ApeosPort)

ApeosPort offers three values for generating a new utilization scene.


## ● High Compatibility with Internet IT Systems

### Apeos iiX linkage

ApeosPort, which adopts the Apeos iiX as its framework, can be linked with existing information sharing software\*. For example, through linking with ArcWizShare\*, which is for sharing documents registered in a database on the web, ApeosPort allows browsing, searching, and directing print commands for shared documents on the ArcWizShare server directly from its control panel. Document registration is also possible via a simple operation from the control panel.

\*1: Optional External Access Kit and Extension System Memory (512 MB) are required.  
\*2: Separately sold software. ArcWizShare External Access for Apeos is required for linking with ApeosPort.  
\* For the software that can be linked to ApeosPort, go to: <http://www.fujixerox.co.jp/apeos/solution.html>

### ● Apeos iiX linkage

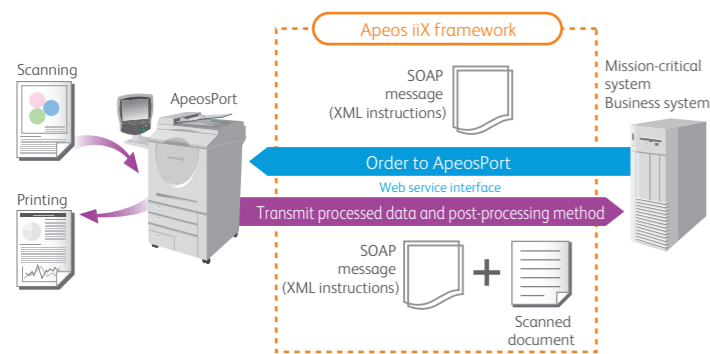

### External authentication

The user information of the directory service\*1 can be used for user authentication when using ApeosPort. Moreover, using the ApeosWare Authentication Agent software, it is possible to set usage restrictions for copying, printing, faxing, and scanning, as well as color mode restrictions, and users not registered to the authentication server can also be allowed to use ApeosPort.

\*1: The Kerberos, SMB, and LDAP protocols are supported.

### IC card linkage

IC Card Gate 2, a separately sold output management & authentication system, achieves even smoother authentication by requiring users just to hold an IC card over the unit.




### Multi-model on-demand printing

After directing the output command from a PC, you can select an available ApeosPort to output the documents. The separately sold DocuHouse On-Demand Print software offers two advantages. One is that the data sent from a client PC can be spooled on the server, and then output can be started by newly issuing a print command from a compatible multifunction device or printer, which reduces the risk of unattended output documents being seen or taken away by a third party. The other is that the accumulated commands can be checked and unnecessary output commands can be deleted, which minimizes wasteful printing.

\* Optional External Access Kit and Extension System Memory (512 MB) are required.

### ● ApeosPort-DocuHouse on-demand printing

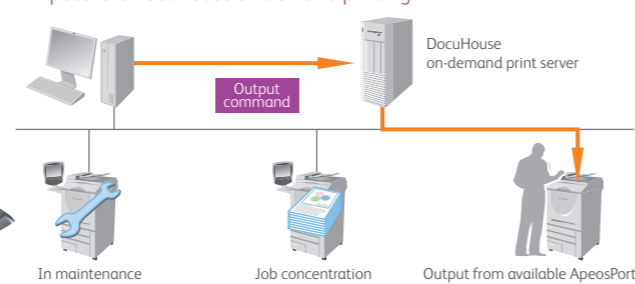

\* The above shows the ApeosPort-III 7000 with Large-size Color Control Panel, Large-size Control Panel Attachment Kit, and C-Finisher.

### Copy

Mono-chrome 75 cpm\*1

### Scan

Mono-chrome 80 ipm\*2 | Color 50 ipm\*2

### Print

Mono-chrome 75 ppm\*1

### Fax

Super G3 compatible\*3


\*1: When using A4LEF with the ApeosPort-III 7000, ApeosPort-III 6000: 65 cpm/ppm; ApeosPort-III 5000: 55 cpm/ppm.  
\*2: Supported by CPS models only. When using Fuji Xerox standard document (A4LEF), stored to mailbox.  
\*3: Optional

## ● Easier Digitalization of Paper Documents

### Multi-send function

On ApeosPort, you can use a function called "Job Flow" to register various stylized series of actions such as digitization of paper documents and distribution of the digitized documents. By using various Job Flow registrations set according to your network environment and work flows, ApeosPort helps maximize your work efficiency. For example, with one-time scanning, ApeosPort achieves dynamic and smooth document distribution such as saving to multiple PCs and servers, and sending as an e-mail attachment, Internet fax, or regular fax. Moreover, using the separately sold ApeosWare JF Pool Service software, a common Job Flow setting can be used on multiple ApeosPort devices.

### ● Multi-send function

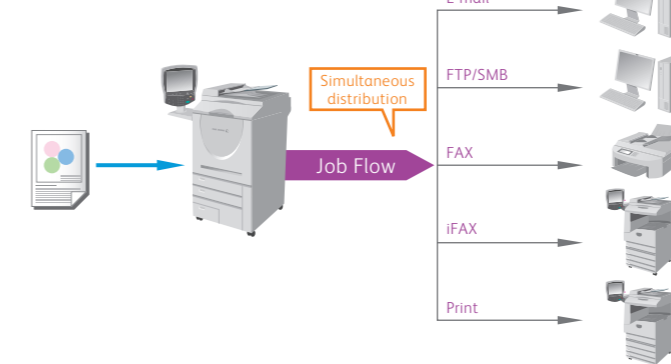


### Acquisition of remote party address

When sending scanned data via e-mail or Internet fax, the e-mail address of the remote party can be searched and acquired from an LDAP server.

### Paperless fax + Job Flow

Digitization of faxed documents (paperless faxes) can also be registered as a Job Flow. By setting a Job Flow to send the received fax from the mailbox of ApeosPort, digitization and distribution of the received fax documents can be achieved with ApeosPort alone. This allows, for example, automatic processing of operations such as conversion to DocuWorks documents or PDFs and transfer to a PC simultaneously with reception.

### ● ApeosPort paperless fax reception

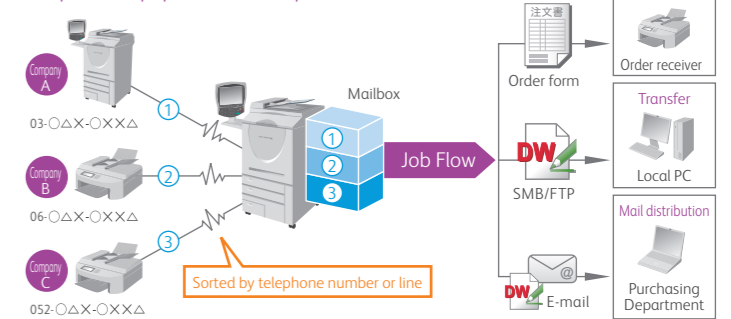


## ● Dependable Document Security

### Signed and encrypted communication via e-mail and Internet fax

ApeosPort allows more secure utilization of e-mails and Internet faxes. Using the Device Certificate for Apeos issued by the Fuji Xerox Product Authentication Office, the PKI\*1 function of ApeosPort is enabled, allowing document encryption with S/MIME\*2 and digital signatures. Illegal eavesdropping and falsification by third parties, as well as spoofing of senders can be prevented.

\*1 Public Key Infrastructure  
\*2 Secure / Multipurpose Internet Mail Extensions

### ● Device Certificate for Apeos

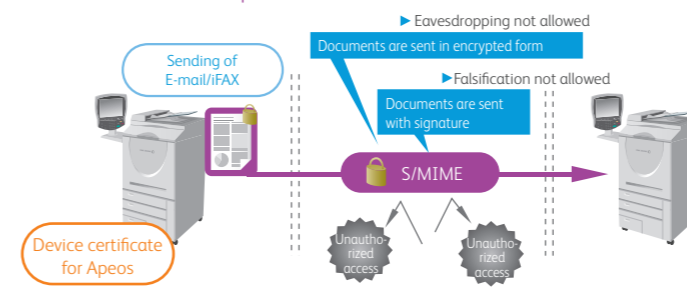

### Scanned document with signature


When scanning paper documents, you can not only save the documents as DocuWorks documents and PDFs, but can also set the signature. This feature reduces the risk of falsification of digitized documents.

### Image log

ApeosPort allows the management of document information beyond who\*, when, and type of task, by storing the images of copied, printed, faxed, and scanned documents. By using the separately sold Image Logging System software, the image data of each document is created, accumulated, and saved. If a confidential document is leaked, the exact document can be quickly investigated based on the document image.

Note: Optional Image Log Kit, Image Extension Kit, and Extension System Memory (512 MB) are required.  
\* The main unit must be set to the authentication mode.

### ● Document image log recording

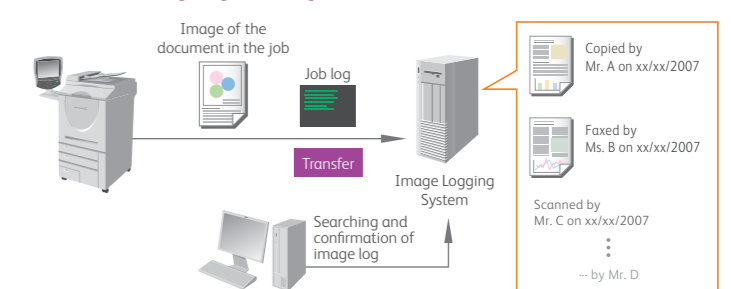

### UUID\* printing

A job log identifier called UUID can be printed on output documents. By issuing ID information to the paper documents themselves, in case of information leakage, details about the leaked documents, such as when and by whom that document was copied, printed, faxed, or scanned can be ascertained.

\*Universally Unique Identifier