

## Major Specifications of ApeosPort-IV C5575 / C4475 / C3375 / C2275

| Basic Function/Copy Function  |  | ApeosPort-IV C5575  | ApeosPort-IV C4475   | ApeosPort-IV C3375         | ApeosPort-IV C2275         |
|---|--|---|--|----------------------------|----------------------------|
| Type  | Console Type   |   |  |                            |                            |
| Memory  | 2GB  |   |  |                            |                            |
| Storage device capacity <sup>*1</sup>   | HDD-equipped machine: 160GB (Applicable area 128GB)<br>SSD-equipped machine: 128GB (Applicable area 128GB)   |   |  |                            |                            |
| Color Capability  | Full Color   |   |  |                            |                            |
| Scanning Resolution   | 600x600dpi   |   |  |                            |                            |
| Printing Resolution   | 1,200x2,400dpi (multivalued photo), 600x600dpi (character/character and photo/photo/map)   |   |  |                            |                            |
| Half-tone/Printable Colors  | 256 levels for each color (16.7 million colors)  |   |  |                            |                            |
| Warm-up Time  | 28 seconds or less, 24 seconds or less when the main power is on (at room temperature of 20°C)   |   |  |                            |                            |
| Original Paper Size   | Sheets/Books: Maximum 297 x 432mm (A3, 11 x 17")   |   |  |                            |                            |
| Output Paper Size   | Max.   | SRA3(320x450mm), 12.6x17.7"(320x449.6mm), 12x18"(304.8x457.2mm), A3 [For By-pass Tray: 12x19"(304.8x482.6mm)] |  |                            |                            |
|   | Min.   | A5 [For By-pass Tray: Postcards (made by Japan Post Service Co., Ltd.), envelope (120x235mm)]                 |  |                            |                            |
| Image Loss  | Lead edge 4mm or less, Trail edge 2mm or less, Right & Left Edges 2mm or less  |   |  |                            |                            |
| Output Paper Weight <sup>*2</sup>   | Trays  | 60-256g/m <sup>2</sup>  |  |                            |                            |
|   | By-pass Tray   | 55-280g/m <sup>2</sup>  |  |                            |                            |
| First Copy Output Time (A4LEF, B&W priority mode) (A4LEF, Color priority mode)  | B&W: 3.7seconds  | B&W: 4.4seconds   | B&W: 4.9seconds  | B&W: 6.6seconds            |                            |
|   | Full Color: 5.2seconds   | Full Color: 5.7seconds  | Full Color: 6.6seconds   | Full Color: 8.7seconds     |                            |
|   | Reduction/Enlargement  | 100% 1:1±0.7%   |  |                            |                            |
|   | Pre-set  | 1:0.500, 1:0.707, 1:0.816, 1:0.866, 1:1.154, 1:1.225, 1:1.414, 1:2.000  |  |                            |                            |
| Variable  | 1:0.25-1:4.00 (by 1% increments)   |   |  |                            |                            |
| Continuous Copy Speed <sup>*3</sup>   | A4LEF/BSLEF  | B&W: 55ppm<br>Color: 50ppm  | B&W: 45ppm<br>Color: 45ppm   | B&W: 35ppm<br>Color: 35ppm | B&W: 25ppm<br>Color: 25ppm |
|   | A4/B5  | B&W: 39ppm<br>Color: 36ppm  | B&W: 32ppm<br>Color: 27ppm   | B&W: 27ppm<br>Color: 27ppm | B&W: 19ppm<br>Color: 19ppm |
|   | B4   | B&W: 32ppm<br>Color: 29ppm  | B&W: 26ppm<br>Color: 26ppm   | B&W: 23ppm<br>Color: 23ppm | B&W: 16ppm<br>Color: 16ppm |
|   | A3   | B&W: 27ppm<br>Color: 25ppm  | B&W: 22ppm<br>Color: 20ppm   | B&W: 20ppm<br>Color: 20ppm | B&W: 14ppm<br>Color: 14ppm |
| Paper Tray/Capacity <sup>*4</sup>   | Standard   | 560 sheets x 4 trays + 100 sheets (By-pass Tray)  |  |                            |                            |
|   | Optional   | High-capacity feed tray (one tray): 2,300 sheets  |  |                            |                            |
| Maximum Paper Capacity  | 4,640 sheets [standard+high-capacity feed tray (one tray)]   |   |  |                            |                            |
| Continuous Copy <sup>*5</sup>   | 999 sheets   |   |  |                            |                            |
| Output Tray Capacity <sup>*6</sup>  | 400 sheets (A4LEF), 200 sheets (A3)  |   |  |                            |                            |
| Power Supply  | AC 100V±10%, 15A, 50/60Hz  |   |  |                            |                            |
| Power Consumption   | 1.5kW or less,<br>Sleep Mode: 1.8W or less <sup>*7</sup> ,<br>Low Power Mode: 60W or less <sup>*8</sup><br>Standby Mode: 120W or less  |   | 1.5kW or less,<br>Sleep Mode: 1.8W or less <sup>*7</sup> ,<br>Low Power Mode: 44W or less <sup>*8</sup><br>Standby Mode: 63W or less               |                            |                            |
|   | Dimensions   |   |  |                            |                            |
| Machine Weight <sup>*9</sup>  | PFS model: (W)640 x (D)699 x (H)1,128mm (with Duplex Automatic Document Feeder B1-C)<br>PFS-PC model: (W)640 x (D)699 x (H)1,143mm (with Duplex Automatic Document Feeder B1-PC) |   | PFS model: 131kg (with Fax and Duplex Automatic Document Feeder B1-C)<br>PFS-PC model: 134kg (with Fax and Duplex Automatic Document Feeder B1-PC) |                            |                            |
|   | Space Requirement  |   |  |                            |                            |
| PFS model: (W)1,064 x (D)699 mm<br>(When the Bypass tray is fully extended, When stopper of DADF is turned on.)<br>PFS-PC model: (W)1,108 x (D)699 mm<br>(When the Bypass tray is fully extended, When stopper of DADF is turned on.) |  |   |  |                            |                            |

\*1: The Storage device capacity is not totally available for customers. \*2: Use of Fuji Xerox brand paper is recommended. Document may not be printed correctly depending on usage conditions. \*3: The speed may slow down due to image quality adjustment. \*4: Fuji Xerox "P" paper. \*5: In order to stabilize the image quality, machine may stop its operation temporarily. \*6: When the optional inner catch tray is installed, the capacity of the center tray is 250 sheets (A4LEF), and that of the inner catch tray is 250 sheets (A4LEF). \*7: Excluding G4 model. \*8: Energy Saver mode is not set in factory default settings. \*9: Excluding toner cartridges.

| Fax Function         |   | Description                  |  |
|----------------------|---|------------------------------|--|
| Send Document Size   | Max: A3, 11x17", Long size document (Max. 600mm)  |                              |  |
| Recording Paper Size | Max: A3, 11x17", Min: A5  |                              |  |
| Transmission Time    | Less than 2 seconds <sup>*1</sup>   |                              |  |
| Transmission Mode    | ITU-T G3  |                              |  |
| Scanning Resolution  | Standard  | 8x3.85 lines/mm, 200x100dpi  |  |
|                      | Fine  | 8x7.7 lines/mm, 200x200dpi   |  |
|                      | Super Fine (400dpi)   | 16x15.4 lines/mm, 400x400dpi |  |
| Super Fine (600dpi)  | 600x600dpi  |                              |  |
| Coding Method        | MH, MR, MMR, JBIG   |                              |  |
| Transmission Speed   | G3: 33.6/31.2/28.8/26.4/24.0/21.6/19.2/16.8/14.4/12.0/9.6/7.2/4.8/2.4kbps                                       |                              |  |
| No. of Fax Lines     | Telephone subscriber line, PBX, facsimile communication network (PSTN), Max. 3 ports <sup>*2</sup> (G3-3 ports) |                              |  |

\*1: When A4 size document with approximately 700 characters is transmitted in standard image-quality (8x3.85 lines/mm) and in high speed mode (28.8kbps or faster, JBIG). Only indicates the time for transmitting the image information and does not include the communication control time. The total communication time will vary depending on the contents of the document, the type of machine receiving the fax, and line condition. \*2: Up to three lines can be connected. Number of ports is that of the channels that can be used for communication.

**<Reproduction Prohibitions>** Please note that reproduction of the following is prohibited by law:  
 ● Domestic and overseas bank notes and coins, government-issued securities, national bonds and local bond certificates.  
 ● Unused postage stamps and post cards.  
 ● Certificate stamps stipulated by law.  
 ● The reproduction of copyrighted works (literary works, musical works, paintings, engravings, maps, cinematographic works, photographic works, etc.) is prohibited except when they are reproduced personally, at home or within limited range.

For more information or detailed product specifications, call or visit us at

**Fuji Xerox Co., Ltd.**  
 9-7-3 Akasaka, Minato-ku, Tokyo 107-0052  
 Tel. 03-6271-5111

<http://www.fujixerox.co.jp/eng>

Xerox and the sphere of connectivity design are trademarks or registered trademarks of Xerox Corporation in the U.S. and/or other countries.

| Print Function                       |   | Description   |  |
|--------------------------------------|---|---|--|
| Type                                 | Built-in Type   |   |  |
| Continuous Print Speed <sup>*1</sup> | Same as those shown in Fundamental Function/Copy Function   |   |  |
| Print Resolution                     | Output  | 1,200x1,200dpi, 1,200x2,400dpi  |  |
|                                      | Data Processing   | Standard: 600x600dpi, High quality: 600x600dpi, High resolution: 1,200x1,200dpi   |  |
| PDL                                  | Standard  | ART EX  |  |
|                                      | Optional  | Adobe® PostScript® 3™   |  |
| Protocol                             | Ethernet (Standard)   | TCP/IP (Ipd, IPP, Port1900, SMB, WSD, Novell® NetWare®, BMLINKS®, ThinPrint®), Novell® NetWare® (IPX/SPX), NetBEUI (SMB), EtherTalk <sup>2</sup>  |  |
|                                      | Operating System <sup>*3</sup>  | Standard: [ART EX Driver] Windows® 2000 Japanese/English, Windows® XP Japanese/English, Windows Server® 2003 Japanese/English, Windows Vista® Japanese/English, Windows Server® 2008 (x86) Japanese/English, Windows® 7 Japanese/English, Windows® XP Professional x64 Edition Japanese/English, Windows Server® 2003 x64 Editions Japanese/English, Windows Vista® 64-bit Japanese/English, Windows Server® 2008 (x64) Japanese/English, Windows Server® 2008 R2 (x64) Japanese/English, Windows® 7 64-bit Japanese/English, [Mac OS X Driver] Mac OS X 10.5-10.7 Japanese/English |  |
| Optional                             | [Adobe® PostScript® 3™ Kit] Windows® 2000 Japanese/English, Windows® XP Japanese/English, Windows Server® 2003 Japanese/English, Windows Vista® Japanese/English, Windows Server® 2008 (x86) Japanese/English, Windows® 7 Japanese/English, Windows® XP Professional x64 Edition Japanese/English, Windows Server® 2003 x64 Editions Japanese/English, Windows Vista® 64-bit Japanese/English, Windows Server® 2008 (x64) Japanese/English, Windows Server® 2008 R2 (x64) Japanese/English, Windows® 7 64-bit Japanese/English, Mac OS X 10.3.9-10.4.11/10.5/10.6/10.7 Japanese |   |  |
|                                      | [Mac OS X Driver] Mac OS X 10.5-10.7 Japanese/English   |   |  |
| Fonts                                | Standard  | Outline (Heisei-Mincho™ W3, Heisei-Kaku-Gothic™ WS, European 19 Fonts), Stroke (Japanese Fonts, European Fonts: for HP-GL)  |  |
|                                      | Optional  | [Adobe® PostScript® 3™ Kit] Heisei 2 Fonts: Japanese 2 Fonts (Heisei-Mincho™ W3, Heisei-Kaku-Gothic™ WS), European 136 Fonts<br>Morisawa 2 Fonts: Japanese 2 Fonts (Ryumin L-KL™, Middle Gothic BBB™), European 136 Fonts [Emulation Kit] European 82 Fonts, Symbol 37 Sets   |  |
| Emulation                            | Standard  | ART IV, ESC/P (VP-1000), BMLINKS®, PDF, XPS, Docuworks, TIFF, JPEG  |  |
|                                      | Optional  | [Emulation Kit or Adobe® PostScript® 3™ Kit] PC-PR201H, HP-GL (HP7586B), HP-GL/2, RTL (HP Design Jet 750C Plus), PCL5/PCL6  |  |
| Connectivity                         | Standard  | Ethernet 100BASE-TX/10BASE-T, USB2.0 <sup>*4</sup>  |  |
|                                      | Optional  | Ethernet 1000BASE-T   |  |

\*1: The speed may be lower due to image quality adjustment. Printing speed may be lower depending on documents when printed in high resolution. \*2: The optional Adobe® PostScript® 3™ kit is required. Supports Mac OS 9.2.2, Japanese, Mac OS X 10.3.9-10.4.6/10.4.8-10.4.11/10.5 Japanese. \*3: Please refer to the Fuji Xerox web site about the latest compliant OS information. \*4: Supports Windows® 2000, Windows® XP, Windows Server® 2003, Windows Vista®, Windows Server® 2008 (x86), Windows® 7, Windows® XP Professional x64 Edition, Windows Server® 2003 x64 Editions, Windows Vista® 64-bit, Windows Server® 2008 (x64), Windows Server® 2008 R2 (x64), Windows® 7 64-bit Japanese/English, Mac OS X 10.3.9-10.4.6/10.4.8-10.4.11/10.5/10.6/10.7 Japanese. \*5: WSD: Web Services on Devices. \*6: XPS: XML Paper Specification. \*7: To print in a Linux® OS environment, please use the Japanese Linux® printer driver which can be downloaded from the Fuji Xerox web site as non-guaranteed software.

| Scan Function                |   | Description  |  |
|------------------------------|---|--|--|
| Type                         | Color Scanner   |  |  |
| Original Paper Size          | Same as those shown in Fundamental Function/Copy Function   |  |  |
| Scanning Resolution          | 600x600dpi, 400x400dpi, 300x300dpi, 200x200dpi  |  |  |
| Scanning Half-tone           | 10-bit input, 8-bit output for each RGB color   |  |  |
| Scanning Speed <sup>*1</sup> | Duplex Automatic Document Feeder B1-C   | B&W: 70ipm, Color: 70ipm<br>[Fuji Xerox standard document (A4 LEF), 200 dpi, to device folder.]  |  |
|                              | Duplex Automatic Document Feeder B1-C <sup>*2</sup>   | B&W: 80ipm, Color: 80ipm (With single pass 2-sided scanning, B&W: 140 page/min, color: 140 page/min) [Fuji Xerox standard document (A4 LEF), 200 dpi, to device folder.]   |  |
| Connectivity                 | Standard  | Ethernet 100BASE-TX/10BASE-T   |  |
|                              | Optional  | Ethernet 1000BASE-T  |  |
| Store to Folder              | Protocol  | TCP/IP (WebDAV, HTTP)  |  |
|                              | File Format   | B&W Binary: TIFF, DocuWorks <sup>3</sup> , PDF <sup>3</sup> , XPS <sup>3</sup> Grayscale: TIFF, JPEG, DocuWorks <sup>3</sup> , PDF <sup>3</sup> , XPS <sup>3</sup> Full Color: TIFF, JPEG, DocuWorks <sup>3</sup> , PDF <sup>3</sup> , XPS <sup>3</sup> High-compression DocuWorks <sup>3</sup> , High-compression PDF <sup>3</sup> , High-compression XPS <sup>3</sup>  |  |
| Driver                       | TWAIN   |  |  |
|                              | Operating System <sup>*5</sup>  | Windows® 2000 Japanese/English, Windows® XP Japanese/English, Windows Server® 2003 Japanese/English, Windows Vista® Japanese/English, Windows Server® 2008 (x86) Japanese/English, Windows® 7 Japanese/English, Windows® XP Professional x64 Edition Japanese/English, Windows Server® 2003 x64 Editions Japanese/English, Windows Vista® 64-bit Japanese/English, Windows Server® 2008 (x64) Japanese/English, Windows Server® 2008 R2 (x64) Japanese/English, Windows® 7 64-bit Japanese/English, Mac OS X 10.2.x/10.3.8/10.3.9/10.4.2/10.4.4/10.4.8/10.4.9/10.4.10/10.5/10.6 Japanese/English, Novell® NetWare® (5.11/5.12) <sup>*6</sup> |  |
| Save to PC                   | Protocol  | TCP/IP (SMB, FTP)  |  |
|                              | Operating System  | Windows® 2000 Japanese/English, Windows® XP Japanese/English, Windows Server® 2003 Japanese/English, Windows Vista® Japanese/English, Windows Server® 2008 (x86) Japanese/English, Windows® 7 Japanese/English, Windows® XP Professional x64 Edition Japanese/English, Windows Server® 2003 x64 Editions Japanese/English, Windows Vista® 64-bit Japanese/English, Windows Server® 2008 (x64) Japanese/English, Windows Server® 2008 R2 (x64) Japanese/English, Windows® 7 64-bit Japanese/English, Mac OS X 10.2.x/10.3.8/10.3.9/10.4.2/10.4.4/10.4.8/10.4.9/10.4.10/10.5/10.6 Japanese/English, Novell® NetWare® (5.11/5.12) <sup>*6</sup> |  |
| File Format                  | B&W Binary: TIFF, DocuWorks, PDF, XPS Grayscale/Full Color: TIFF, JPEG, DocuWorks, PDF, XPS High-compression DocuWorks, High-compression PDF, High-compression XPS, Microsoft® Word documents <sup>7</sup> , Microsoft® Excel® documents <sup>7</sup> |  |  |
|                              | Scan to e-mail  | Protocol: TCP/IP (SMTP)<br>File Format: B&W Binary: TIFF, DocuWorks, PDF, XPS Grayscale/Full Color: TIFF, JPEG, DocuWorks, PDF, XPS High-compression DocuWorks, High-compression PDF, High-compression XPS, Microsoft® Word documents <sup>7</sup> , Microsoft® Excel® documents <sup>7</sup>  |  |

\*1: Scanning speed varies according to the document type. \*2: When Secure Watermark Kit SP is installed to Duplex Automatic Document Feeder B1-PC equipped machine, the simplex Scanning speed is lower than the specification. \*3: When scanned image is retrieved using CentreWare Internet Services. \*4: When Network Scanner Utility 3 is used. \*5: Please refer to the Fuji Xerox web site about the latest compliant OS information. \*6: Supports only FTP. \*7: To use this feature, an optional Advanced Scan Kit is required. The feature is designed to edit / reuse the text/image of the scanned / saved document. This feature is not to guarantee high-quality output result of text, diagrams and pictures on scanned document. \*8: XPS: XML Paper Specification.

\* If the storage media (hard disk) of the product fails, the data received, stored, or registered in the media may be erased. Fuji Xerox will not be held responsible for any damage caused due to such loss of data.  
 \* Key repair components will be available for at least 7 years after the product is no longer manufactured.

**<For Your Safe Use>**  
 ● Before using the product, read the Instruction Manual carefully for proper use.  
 ● Use the product with an appropriate and adequate power source and voltage displayed.  
 ● Be sure to ground the machine. In the case of a failure or short circuit, an electric shock may result.

**FUJI XEROX**

For comments about Fuji Xerox and consultation, contact the **Customer Information Center.**

**0120-27-4100**

Toll-free call service time: 9:00 to 12:00 and 13:00 to 17:00 excluding Saturdays, Sundays and national holidays (at Headquarters in Tokyo). However, you cannot use this service with an extension telephone with call area restrictions. Please use a nation-wide call available telephone.

The telephone call might be recorded to correctly understand your inquiry or to later check how the receiver provided support.

**ApeosPort-IV**  
 C5575 / C4475 / C3375 / C2275

**FUJI XEROX**


# ApeosPort-IV C5575 / C4475 / C3375 / C2275

Digital Color Multifunction Device



The contents described herein are correct as of January, 2012. **DGE-1207E 1112-1**

# ApeosPort Value

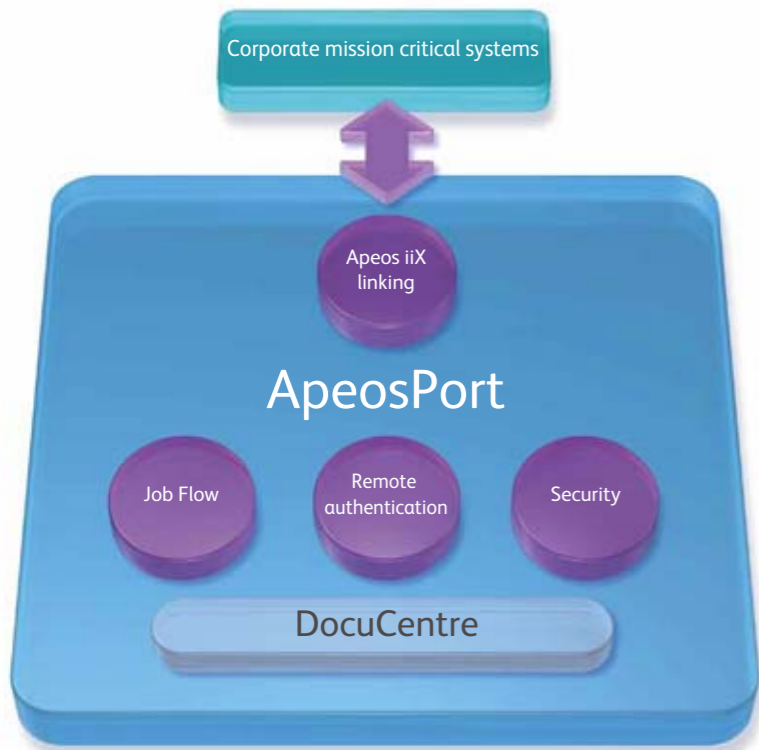

## Expanding your business by linking with systems

The difference with ApeosPort devices from DocuCentre devices is their ability to expand and customize. ApeosPort devices include the excellent multifunctional performance of DocuCentre devices, but also support Fuji Xerox's unique "Apeos iiX" framework, which enables you to seamlessly link with various systems that have a Web service interface, such as document management servers, and core/mission critical/business systems. This ability can be flexibly utilized for a wide range of applications, such as sales assistance, financial account processing, and work for producing application documents. ApeosPort devices are recommended for customers who already have information systems and want to enhance, optimize and prevent risks, and for customers that are considering system expansion or enhancements in the future.



## <Features and functions typical of ApeosPort devices>

### Feature 1 Advanced linking with systems and servers.

#### [Apeos iiX linking] Multifunction devices evolve to Web devices

Apeos iiX is a core technology of ApeosPort devices, which enables you to link with core/mission critical/business systems. The "Web Applications" function based on Apeos iiX technology also enables the operation screens of systems to be directly displayed on the control panel of ApeosPort devices. This assists the seamless flow of paper and digital data.


※ Optional. External Access Kit is required.

#### [Remote authentication] Simple authentication with the information registered in a server

Authentication can be performed for ApeosPort devices using user information registered in an authentication server\*. The burden of management work is reduced since authentication settings per device become unnecessary. Settings can be made to restrict the use of functions and color per user, and to allow users not registered in the server to use ApeosPort devices.

\* Optional. Separately sold ApeosWare Authentication Management is required.

#### • Apeos iiX linking

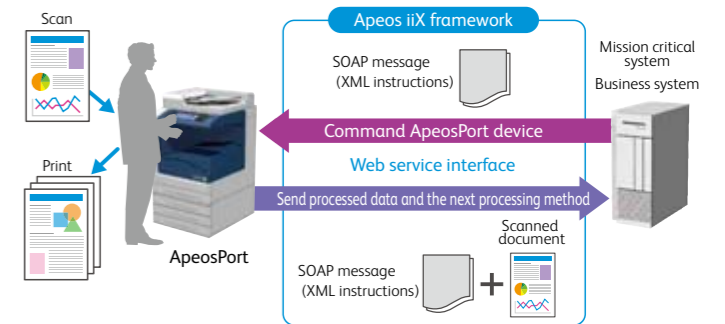


### Feature 2 Smooth digitization of paper documents.


#### [Job flows] Making troublesome processing simple

A single scanning operation enables you to save a document to a server or PC, or send it via e-mail or internet fax. Scanned information can also be converted to a different file format such as the DocuWorks or PDF format according to the destination, and series of operations such as these can be registered as "job flows." This enables troublesome processes to be performed with the touch of a button.

#### • Multi-send function

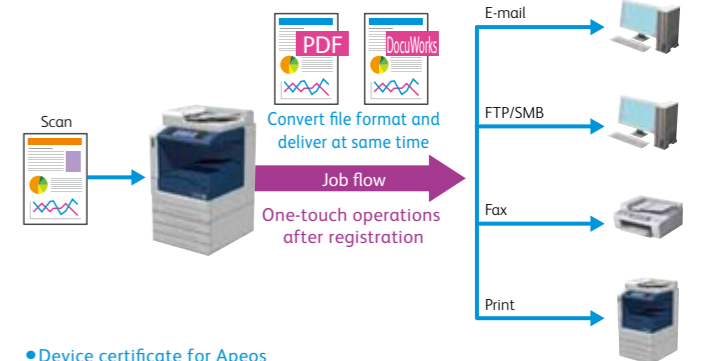

#### • Device certificate for Apeos

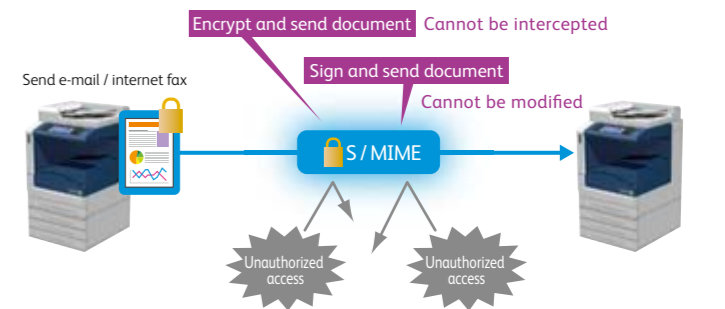

### Feature 3 Further enhanced security.

#### • Encryption/digital signing of e-mail and internet faxes

A "device certificate for Apeos" issued by the Fuji Xerox Product Certificate Authority can be used to perform digital signing and encryption with S/MIME\*.

\* Secure / Multipurpose Internet Mail Extensions

#### • Signing scanned documents

Attaching a digital signature to files using a device certificate enables file modifications to be detected and prevents sender impersonation.

#### • Image logs

The separate ApeosWare Image Log Service Pro product can be used to quickly survey documents that have been leaked from their image data.

\* Optional. Requires the Image Log Kit and Image Extension Kit.

#### • UUID\* printing

Job log identifiers called "UUIDs" can be printed on documents that are output.

\* Universally Unique Identifier



## ApeosPort-IV C5575/C4475/C3375/C2275

| Copy  |   | Print   | Fax                              | Scan  |
|---|---|---|----------------------------------|---|
| <b>C5575</b><br>Color<br>50 ppm <sup>*1</sup>       | <b>B&amp;W</b><br>55 ppm <sup>*1</sup>              | <b>C4475</b><br>Color / B&W<br>45 ppm <sup>*1</sup>                         | Super<br><b>G3</b><br>Compatible | Color / B&W<br><b>80</b><br>ppm <sup>*2,3</sup> |
| <b>C3375</b><br>Color / B&W<br>35 ppm <sup>*1</sup> | <b>C2275</b><br>Color / B&W<br>25 ppm <sup>*1</sup> | <b>140</b><br>ipm <sup>*2,4</sup><br>with single-pass<br>two-sided scanning |                                  |   |

\*1: A4 LEF.

\*2: Fuji Xerox standard document (A4 LEF), 200 dpi, to device folder.

\*3: When equipped with DADF B1-PC (Single Pass DADF), 70 ppm When equipped with DADF B1-C (Normal DADF).

\*4: Only when equipped with DADF B1-PC (Single Pass DADF).

※ The photo is of the ApeosPort-IV C5575 PFS-PC model.