

## Major Specifications of DocuCentre-IV 7080 / 6080 / 5080

### Basic Function/Copy Function

	DocuCentre-IV 7080	DocuCentre-IV 6080	DocuCentre-IV 5080	
Type	Console Type			
Memory	2GB			
HDD*1	160GB (available capacity: 128GB)			
Scanning Resolution	600x600dpi			
Printing Resolution	2,400dpi-equivalentx600dpi			
Half-tone	256 levels			
Warm-up Time	30 seconds or less (at room temperature of 20°C)			
Original Paper Size	Maximum for sheet and book: 297x432 mm (A3, 11x17")			
Output Paper Size	Max.	A3, 11x17" [For By-pass Tray: 12x18"(304.8x457.2mm)]		
	Min.	A5 [For By-pass Tray: Postcards (made by Japan Post Service Co., Ltd.)]		
Output Paper Weight*2	Trays	52-200g/m <sup>2</sup>		
	By-pass Tray	52-250g/m <sup>2</sup>		
First Copy Output Time (A4LEF)	3.0seconds	3.0seconds	3.1seconds	
	100%	1:1±0.7%		
	Preset	1:0.500, 1:0.707, 1:0.816, 1:0.866, 1:1.154, 1:1.225, 1:1.414, 1:2.000		
	Variable	1:0.25-1:4.00 (by 1% increments)		
Continuous Copy Speed*3	B5LEF	79ppm	68ppm	58ppm
	A4LEF	75ppm	65ppm	55ppm
	A4/B5	55ppm	47ppm	40ppm
	B4	44ppm	39ppm	33ppm
	A3	37ppm	33ppm	28ppm
Paper Tray/Capacity*4	Standard	560 sheets x 2 trays + 1,710 sheets x 2,140 sheets + 100 sheets (By-pass Tray) = 5,070 sheets		
	Optional	High-capacity feed tray (one tray): 2,300 sheets, high-capacity feed tray (two trays): 2,300 sheets x 2 trays		
	Maximum Paper Capacity	9,820 sheets [standard + high-capacity feed tray (two trays) + By-pass Tray]		
Continuous Copy*5	9,999 sheets			
Output Tray Capacity*4	500 sheets (simple catch tray)			
Power Supply	AC100V±10%, 15A, 50/60Hz			
Power Consumption	1.5kW or less, Sleep Mode: 1.8W or less, Low Power Mode: 162W or less*, Standby Mode: 226W or less			
	Energy Efficiency	87Wh/h (DC model)	95Wh/h (DC model)	47Wh/h (DC model)
Dimensions	(W)620 x (D)804 x (H)1,153mm			
Machine Weight*7	195kg			
Space Requirement	(W)1,491 x (D)804 mm (When the By-pass tray is fully extended.)			

\*1: Not all of the indicated hard disk capacity may be available. \*2: Use of Fuji Xerox brand paper is recommended. Document may not be printed correctly depending on usage conditions. \*3: The speed may be lower due to image quality adjustment. \*4: Fuji Xerox "P" paper. \*5: In order to stabilize the image quality, machine may stop its operation temporarily. \*6: Energy Saver mode is not set in factory default settings. \*7: Excluding toner cartridges.

### Fax Function (Optional)

Item	Description	
Send Document Size	Max.: A3, 11x17", Long size document (Max. 600mm)	
Recording Paper Size	Max.: A3, 11x17", Min.: A5	
Transmission Time	Less than 2 seconds*1	
Transmission Mode	ITU-T G3	
Scanning Resolution	Standard	8x3.85 lines/mm, 200x100dpi
	Fine	8x7.7 lines/mm, 200x200dpi
	Super Fine (400dpi)	16x15.4 lines/mm, 400x400dpi
	Super Fine (600dpi)	600x600dpi
Coding Method	MH, MR, MMR, JBIG	
Transmission Speed	G3: 33.6/31.2/28.8/26.4/24.0/21.6/19.2/16.8/14.4/12.0/9.6/7.2/4.8/2.4kbps	
No. of Fax Lines	Telephone subscriber line, PBX, facsimile communication network (PSTN), Max. 3 ports*2 (G3-3 ports)	

\*1: When A4 size document with approximately 700 characters is transmitted in standard image-quality (8x3.85 lines/mm) and in high speed mode (28.8kbps or faster, JBIG). Only indicates the time for transmitting the image information and does not include the communication control time. The total communication time will vary depending on the contents of the document, the type of machine receiving the fax, and line condition. \*2: Up to three lines can be connected. Number of ports in that of the channels that can be used for communication.

\*1: The speed may be lower due to image quality adjustment. Printing speed may be lower depending on documents when printed in high resolution. \*2: The optional Adobe® PostScript® 3™ kit is required. Supports Mac OS 9.2.2 Japanese, Mac OS X 10.3.9-10.4.6/10.4.11/10.5 Japanese. \*3: Please refer to the Fuji Xerox web site about the latest compliant OS information. \*4: Supports Windows® 2000, Windows® XP, Windows Server® 2003, Windows Vista®, Windows Server® 2008 (x86), Windows® 7, Windows® XP Professional x64 Edition, Windows Server® 2003 x64 Editions, Windows Vista® 64-bit, Windows Server® 2008 (x64), Windows Server® 2008 R2 (x64), Windows® 7 64-bit Japanese/English, Mac OS X 10.3.9-10.4.6/10.4.8-10.4.11/10.5/10.6/10.7 Japanese. \*5: When this option is equipped, Ethernet 100BASE-TX/10BASE-T will not be available. \*6: WSD: Web Services on Devices. \*7: XPS: XML Paper Specification. \*8: To print in a Linux® OS environment, please use the Japanese Linux® printer driver which can be downloaded from the Fuji Xerox web site as non-proprietary software.

### <Reproduction Prohibitions> Please note that reproduction of the following is prohibited by law:

● Domestic and overseas bank notes and coins, government-issued securities, national bonds and local bond certificates. ● Unused postage stamps and post cards. ● Certificate stamps stipulated by law. ● The reproduction of copyrighted works (literary works, musical works, paintings, engravings, maps, cinematographic works, photographic works, etc.) is prohibited except when they are reproduced personally, at home or within limited range.

### Print Function (Optional)

Item	Description	
Type	Built-in Type	
Continuous Print Speed*1	Same as those shown in Fundamental Function/Copy Function	
Print Resolution	Output	1,200x1,200dpi
	Data Processing	Standard: 600x600dpi, High resolution: 1,200x1,200dpi
	Standard	ART EX
Protocol	Optional	Adobe® PostScript® 3™
	Ethernet (Standard)	TCP/IP (lpd, IPP, Port9100, SMB, WSD, Novell® NetWare®, BMLinkS®, ThinPrint®), Novell® NetWare® (IPX/SPX), NetBEUI (SMB), EtherTalk®2
Operating System*3	Standard	[ART EX Driver] Windows® 2000 Japanese/English, Windows® XP Japanese/English, Windows Server® 2003 Japanese/English, Windows Vista® Japanese/English, Windows Server® 2008 (x86) Japanese/English, Windows® 7 Japanese/English, Windows® XP Professional x64 Edition Japanese/English, Windows Server® 2003 x64 Editions Japanese/English, Windows Vista® 64-bit Japanese/English, Windows Server® 2008 (x64) Japanese/English, Windows Server® 2008 R2 (x64) Japanese/English, Windows® 7 64-bit Japanese/English, [Mac OS X Driver] Mac OS X 10.5-10.7 Japanese/English
	Optional	[Adobe® PostScript® 3™ Kit] Windows® 2000 Japanese/English, Windows® XP Japanese/English, Windows Server® 2003 Japanese/English, Windows Vista® Japanese/English, Windows Server® 2008 (x86) Japanese/English, Windows® 7 Japanese/English, Windows® XP Professional x64 Edition Japanese/English, Windows Server® 2003 x64 Editions Japanese/English, Windows Vista® 64-bit Japanese/English, Windows Server® 2008 (x64) Japanese/English, Windows Server® 2008 R2 (x64) Japanese/English, Windows® 7 64-bit Japanese/English, Mac OS X 10.3.9-10.4.6/10.4.8-10.4.11/10.5-10.7 Japanese/English
Fonts	Standard	Outline (Heisei-Mincho™ W3, Heisei-Kaku-Gothic™ WS, European 19 Fonts), Stroke (Japanese Fonts, European Fonts: for HP-GL)
	Optional	[Adobe® PostScript® 3™ Kit] Heisei 3 Fonts (Heisei-Mincho™ W3, Heisei-Kaku-Gothic™ WS, Heisei-Maruo-Gothic™ W4), European 136 Fonts, Morisawa 2 Fonts: Japanese 2 Fonts (Ryumin L-KL™, Middle Gothic BBB™), European 136 Fonts [Emulation Kit] European 82 Fonts, Symbol 37 Sets
Emulation	Standard	ART IV, ESC/P (VP-1000), BMLinkS®, PDF, XPS, Docuworks, TIFF, JPEG
	Optional	[Emulation Kit or Adobe® PostScript® 3™ Kit] PC-PR201H, HP-GL (HP7586B), HP-GL/2RTL (HP Design Jet750C Plus), PCL5/PCL6
Connectivity	Standard	Ethernet 100BASE-TX/10BASE-T, USB2.0*4
	Optional	Ethernet 1000BASE-T*5


\*1: The speed may be lower due to image quality adjustment. Printing speed may be lower depending on documents when printed in high resolution. \*2: The optional Adobe® PostScript® 3™ kit is required. Supports Mac OS 9.2.2 Japanese, Mac OS X 10.3.9-10.4.6/10.4.11/10.5 Japanese. \*3: Please refer to the Fuji Xerox web site about the latest compliant OS information. \*4: Supports Windows® 2000, Windows® XP, Windows Server® 2003, Windows Vista®, Windows Server® 2008 (x86), Windows® 7, Windows® XP Professional x64 Edition, Windows Server® 2003 x64 Editions, Windows Vista® 64-bit, Windows Server® 2008 (x64), Windows Server® 2008 R2 (x64), Windows® 7 64-bit Japanese/English, Mac OS X 10.3.9-10.4.6/10.4.8-10.4.11/10.5/10.6/10.7 Japanese. \*5: When this option is equipped, Ethernet 100BASE-TX/10BASE-T will not be available. \*6: WSD: Web Services on Devices. \*7: XPS: XML Paper Specification. \*8: To print in a Linux® OS environment, please use the Japanese Linux® printer driver which can be downloaded from the Fuji Xerox web site as non-proprietary software.

### Scan Function (Not available for DC models)

Item	Description	
Type	Color Scanner	
Original Paper Size	Same as those shown in Fundamental Function/Copy Function	
Scanning Resolution	600x600dpi, 400x400dpi, 300x300dpi, 200x200dpi	
Scanning Half-tone	10-bit input, 8-bit output for each RGB color	
Scanning Speed*1	B&W: 100ipm, Color: 100ipm (With single pass 2-sided scanning, B&W: 200 page/min, color: 200 page/min) [Fuji Xerox standard document (A4 LEF), 200 dpi, to device folder.]	
Connectivity	Standard	Ethernet 100BASE-TX/10BASE-T
	Optional	Ethernet 1000BASE-T
Store to Folder	Protocol	TCP/IP (WebDAV, HTTP)
	File Format	B&W Binary: TIFF, DocuWorks®, PDF®, XPS®2, Grayscale: TIFF, JPEG®, DocuWorks®, PDF®, XPS®2, Full Color: TIFF, JPEG, DocuWorks®, PDF®, XPS®, High-compression DocuWorks®, High-compression PDF®, High-compression XPS®2
Driver	Operating System*4	Windows® 2000 Japanese/English, Windows® XP Japanese/English, Windows Server® 2003 Japanese/English, Windows Vista® Japanese/English, Windows Server® 2008 (x86) Japanese/English, Windows® 7 Japanese/English, Windows® XP Professional x64 Edition Japanese/English, Windows Server® 2003 x64 Editions Japanese/English, Windows Vista® 64-bit Japanese/English, Windows Server® 2008 (x64) Japanese/English, Windows Server® 2008 R2 (x64) Japanese/English, Windows® 7 64-bit Japanese/English, Mac OS X 10.2.x/10.3.9/10.4.2/10.4.4/10.4.8/10.4.9/10.4.10/10.5/10.6 Japanese/English, Novell® NetWare® (5.11/5.12)*5
	File Format	B&W Binary: TIFF, DocuWorks, PDF, XPS, Grayscale/Full Color: TIFF, JPEG, DocuWorks, PDF, XPS, High-compression DocuWorks, High-compression PDF, High-compression XPS, Microsoft® Word documents®, Microsoft® Excel® documents®
Scan to e-mail	Protocol	TCP/IP (SMTP)
	File Format	B&W Binary: TIFF, DocuWorks, PDF, XPS, Grayscale/Full Color: TIFF, JPEG, DocuWorks, PDF, XPS, High-compression DocuWorks, High-compression PDF, High-compression XPS, Microsoft® Word documents®, Microsoft® Excel® documents®

\*1: Scanning speed varies according to the document type. \*2: When scanned image is retrieved using CentreWare Internet Services. \*3: When Network Scanner Utility 3 is used. \*4: Please refer to the Fuji Xerox web site about the latest compliant OS information. \*5: Supports only FTP. \*6: To use this feature, an optional Advanced Scan Kit is required. The feature is designed to edit / reuse the text/image of the scanned / saved document. This feature is not to guarantee high-quality output result of text, diagrams and pictures on scanned document. \*7: XPS: XML Paper Specification.

\* If the storage media (hard disk) of the product fails, the data received, stored, or registered in the media may be erased. Fuji Xerox will not be held responsible for any damage caused due to such loss of data.  
\* Key repair components will be available for at least 7 years after the product is no longer manufactured.

**<For Your Safe Use>**  
 Before using the product, read the Instruction Manual carefully for proper use. ● Use the product with an appropriate and adequate power source and voltage displayed. ● Be sure to ground the machine. In the case of a failure or short circuit, an electric shock may result.

## DocuCentre-IV

7080 / 6080 / 5080



# DocuCentre-IV 7080 / 6080 / 5080

Digital Black and White Multifunction Device



For more information or detailed product specifications, call or visit us at

**Fuji Xerox Co., Ltd.**

9-7-3 Akasaka, Minato-ku, Tokyo 107-0052

Tel. 03-6271-5111

<http://www.fujixerox.co.jp/eng>



For comments about Fuji Xerox and consultation, contact the **Customer Information Center.**

**0120-27-4100**

Toll-free call service time: 9:00 to 12:00 and 13:00 to 17:00 excluding Saturdays, Sundays and national holidays (at Headquarters in Tokyo). However, you cannot use this service with an extension telephone with call area restrictions. Please use a nation-wide call available telephone.

The telephone call might be recorded to correctly understand your inquiry or to later check how the receiver provided support.

# New Product Topics

With more power, ease of use and further improved eco-friendly performance  
DocuCentre-IV 7080 / 6080 / 5080, the summit of black and white multifunction devices

We propose a more convenient use of information  
by linking mobile devices with Working Folders.



Digital Black and White Multifunction Device

### DocuCentre-IV 7080/6080/5080


Copy	Print	Fax	Scan
B&W <b>75</b> ppm*1	B&W <b>75</b> ppm*1	Super <b>G3</b> Compatible	Color / B&W <b>100</b> ppm*2  <b>200</b> ipm*2 with single-pass two-sided scanning

\*1: When using A4 LEF, DocuCentre-IV 7080, 65 ppm when using DocuCentre-IV 6080, 55 ppm when using DocuCentre-IV 5080.  
\*2: Fuji Xerox standard document (A4 LEF), 200 dpi, to device folder.

DocuCentre-IV 7080/6080/5080	Copy	Print	Fax	Scan	Duplex Automatic Document Feeder
DC model	●	○	○	-	●
CPS model	●	○	○	●	●

※ The photo is of the DocuCentre-IV 7080. ● Standard ○ Optional - : Uninstallable

## Mobile & Cloud Service Linkage

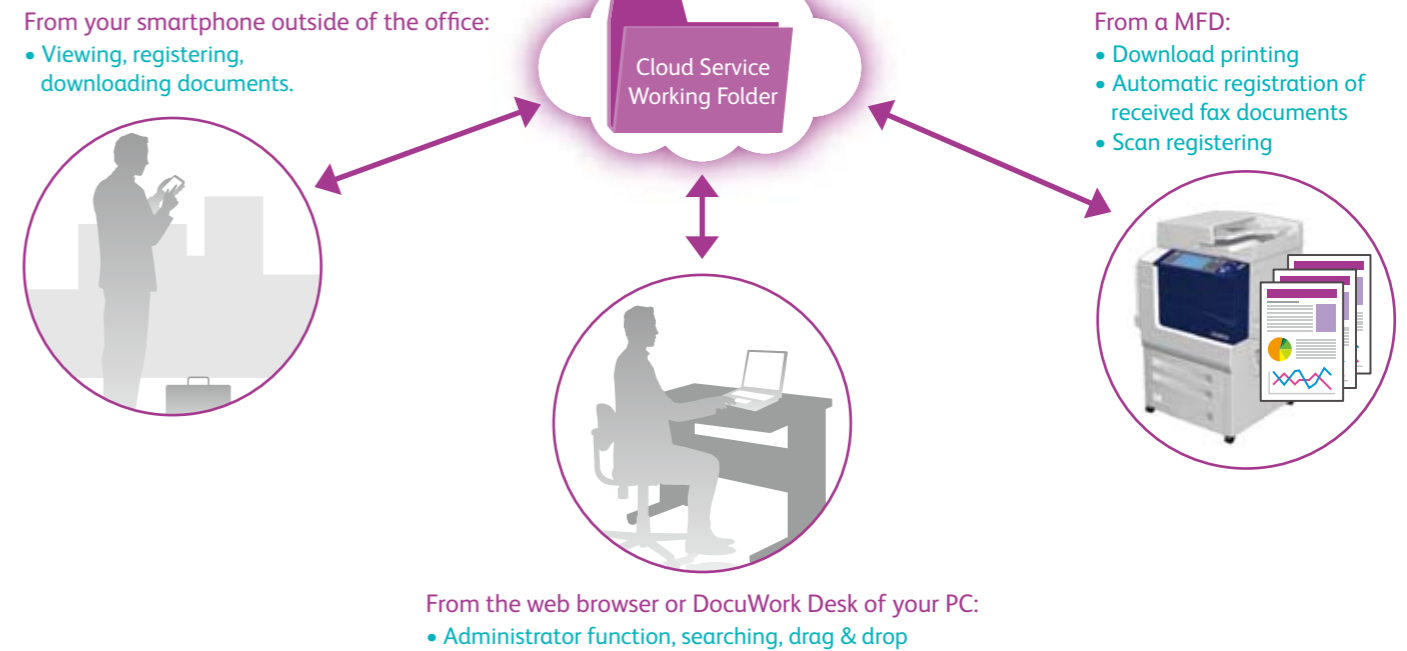

Documents can be viewed when you are away from the office using smartphones and tablet devices. Even if you do not have a document server at your company, a Working Folder can be used to enable smooth digitization and information sharing without being restricted to a specific location.

Waste-free powering only the parts that are used!



### Smart Energy Management Technology

The device has reduced power consumption and CO<sub>2</sub> emissions by dividing the device into four modules; "scanner," "control panel," "output device," and "controller," and only activating the parts that are to be used for a current function. In addition, users close the device are not bothered by noises for jobs that do not use the document feeding and output device.

High-speed scanning at max 200 ipm



### Color single-pass two-side scanning

The front and back sides of 2-sided documents are scanned at maximum speed of 200 ipm\* in both color and black & white. With the combination of the duplex automatic document feeder, which has a loading capacity of 250 sheets in standard, this powerfully assists your digitization of paper documents. This is precisely the machine that can support high-speed scanning needs to meet the rising mobile device demands.

※ CPS models are equipped with the scanning function. The scanning function can not be optionally added to DC models.  
\* Fuji Xerox standard document (A4 LEF), 200 dpi, to device folder.

### Control panel usable in approximately 3 seconds

■ **High-speed reactivation of control panel**  
Previously when a device is recovering from the sleep mode, the control panel to be displayed after waiting for the output device to warm up. For the DocuCentre-IV 7080 model series, the control panel is operational in approximately 3 seconds after pressing the energy saver button. Therefore, the user can perform operations without waiting for the device to become operational.



### Deterring the appearance of "streaks" on scanned images

■ **Two-side scanning without the platen glass becoming dirty**  
With the Fuji Xerox color single-pass two-sided scanning, the platen glass surface of the device is difficult to become dirty since the front surface of a document is scanned with a dedicated color sensor and the scanned from underneath the platen glass for the back side. It is less likely that black streaks appear on images, even during continuous scanning.



A cloud service that directly links with multifunction devices!



### Working Folder

Fuji Xerox's "Working Folder" cloud service can be linked and directly accessed from a multifunction device. Scanned documents and received fax documents can be forwarded and stored documents can be outputted. Documents in the cloud can be operated using DocuWorks Desk, and can also be viewed and operated from smartphones.

※ The conclusion of the Working Folder Service contract is required in using this function.  
※ Linkage is possible for CPS models only.

### Outputting from a tablet device

■ **Print Utility for iOS / Android™**  
A dedicated printing application that supports the iPhone, iPad, and Android™ devices is provided free-of-charge. This enables you to print Web pages, photos, address book contacts\*, and captured images, etc. via a wireless LAN access point.

※ Print Utility for iOS can be downloaded from the App Store free-of-charge, and Print Utility for Android™ can be downloaded from the Android™ Market free-of-charge.  
※ the printer kit is required.

\* Print Utility for iOS only.

